



Monitor Well



Pneumatic Plugs
Mechanical Plugs

- Original Gripper®
- Hub-Fit Gripper®
- Clean-Out Gripper®
- T-Handle Gripper®
- Iron Grip®
- Econ-O-Grip®
- Petro Econ-O-Grip®
- Kwik 'N Sure®
- Sure-Grip®
- Monitor Well
- Test Caps - Test Kap


- Deflection Gauges
- Testing Equipment
- Tools & Accessories
- Technical Data
- Contact Us
- Used Inventory
- Search

Monitor-Well Locking Plug Features:


- Designed to seal monitor wells
- Meets all EPA requirements for locking plugs
- Sized to seal Schedule 40 piping
- 2" and 4" sizes can also seal Schedule 5 pipe
- Works with Cherne's solid brass padlock

Equipped with:

- Chemical and petroleum-resistant Estaloc™ plastic top and bottom plates
- Petroleum resistant nitrile o-ring
- Stainless steel carriage bolt
- Yellow chromate-coated locking latch

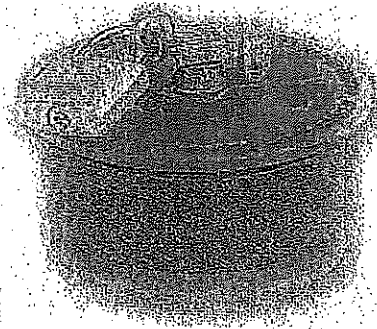

Monitor-Well Plug Installed

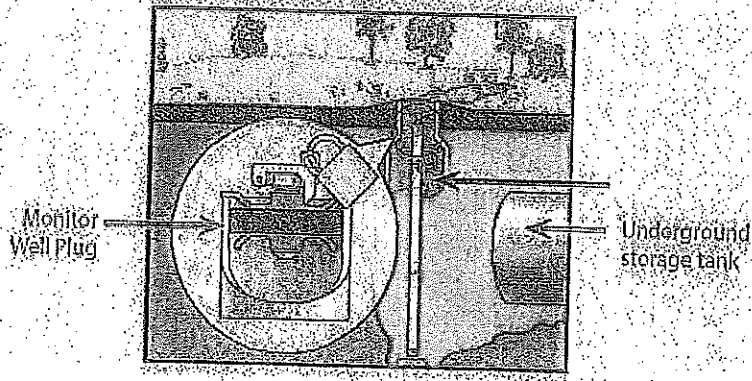

Part Number	Nominal Size	Range of Use	Maximum Back Pressure	Length	Product Weight
-------------	--------------	--------------	-----------------------	--------	----------------

Monitor-Well

271648	1" - 1.25" (25-30 mm)	1"-1.38" (23-35 mm)	6.5 psi (0.45 bar)	15 ft. (4.5 M)	2.5" (64 mm)	4.7 oz (0.14 kg)
271675	2" (50 mm)	1.9"-2.31" (49-59 mm)	6.5 psi (0.45 bar)	15 ft. (4.5 M)	2.5" (64 mm)	4.5 oz (0.13 kg)
271669	3" (75 mm)	2.8"-3.1" (71-79 mm)	6.5 psi (0.45 bar)	15 ft. (4.5 M)	2.6" (66 mm)	7.5 oz (0.21 kg)
271683	4" (100 mm)	3.8"-4.38" (97-111 mm)	6.5 psi (0.45 bar)	15 ft. (4.5 M)	3.0" (76 mm)	12.5 oz (0.35 kg)